

The Light beyond The Technology



LED
LIGHTING



(주)누리온

경기도 안산시 상록구 팔곡두레길 111


T. 1877-7722 F. 0505-312-1800

info@nuri-on.com



내일의 가치를 창조하는 기업 누리온

직관형램프

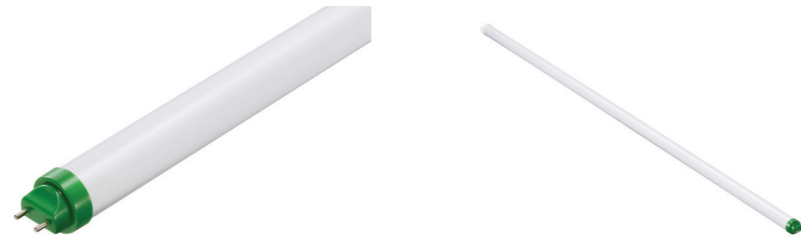

L-Tube

SPECIFICATION/G13

모델명	HLT-150HCO	HLT-175HCO	HLT-210HCO
소비전력(W)	15	17.5	21
색온도(K)	5,700	5,700	5,700
광속(lm)	2,430	2,468	3,381
광효율(lm/W)	162	141	161
연색성(Ra)	80	80	80
무게(kg)	0.25	0.25	0.25
인증	KS, 고효율	KS, 고효율	KS, 고효율

지하주차장등



RACEWAY

SPECIFICATION/적부형

모델명	HBL-418	HBL-430	HBL-540
소비전력(W)	18.0	30.0	40.0
색온도(K)	5,700	5,700	5,700
광속(lm)	2,502	3,600	4,920
광효율(lm/W)	139	120	123
연색성(Ra)	80	80	80
무게(kg)	0.67	0.67	0.67
인증	KS, 고효율	KS, 고효율	KS, 고효율

평판조명



엣지평판조명

SPECIFICATION/G13


모델명	BL07-C4057EM-RSS
소비전력(W)	40
색온도(K)	5,700
광속(lm)	4,600
광효율(lm/W)	115
연색성(Ra)	80
무게(kg)	3.2
인증	KS, 고효율

엣지평판조명

SPECIFICATION/G13

모델명	BL07-B4057EM-RSS
소비전력(W)	40
색온도(K)	5,700
광속(lm)	4,600
광효율(lm/W)	115
연색성(Ra)	80
무게(kg)	3.2
인증	KS, 고효율

High-bay

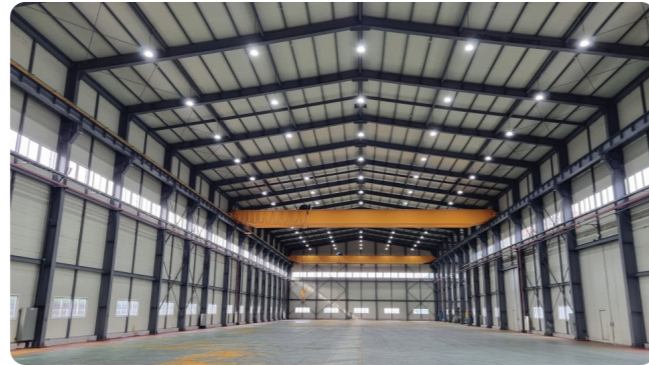

LED투광등(AC TYPE)

SPECIFICATION/천정형, 직부형

모델명	HIL-006-01A-100N-A	HIL-006-01A-120N-A	HIL-006-02A-150N-A
소비전력(W)	100	120	150
색온도(K)	5,700	5,700	5,700
광속(lm)	11,800	14,040	17,250
광효율(lm/W)	118	117	115
연색성(Ra)	80	80	80
무게(kg)	2.5(팬던트, 갓포함)	2.5(팬던트, 갓포함)	2.5(팬던트, 갓포함)
인증	KS, 고효율	KS, 고효율	KS, 고효율

LED투광등(DC TYPE)

SPECIFICATION/천정형

모델명	HIL-006-01A-0800	HIL-006-01A-1000	HIL-006-01A-1200	HIL-006-02A-1500	HIL-006-03A-200R
소비전력(W)	80	100	120	150	200
색온도(K)	5,700	5,700	5,700	5,700	5,700
광속(lm)	10,160	12,200	14,880	18,600	27,000
광효율(lm/W)	125	121	120	121	139
연색성(Ra)	80	80	80	80	80
무게(kg)	2.5(팬던트), 2.65(직부)	2.5(팬던트), 2.65(직부)	2.5(팬던트), 2.65(직부)	2.5(팬던트), 2.65(직부)	2.5(팬던트), 2.65(직부)
인증	KS, 고효율	KS, 고효율	KS, 고효율	KS, 고효율	KS, 고효율

고출력투광등




사각(멀티렌즈)

SPECIFICATION/직부형



모델명	NFL-H10-150A	NFL-H10-200A	NFL-H10-300A	NFL-H10-400A
소비전력(W)	150	200	300	400
색온도(K)	5,000	5,000	5,000	5,000
광속(lm)	19,500	27,200	42,000	55,200
광효율(lm/W)	130	136	140	138
연색성(Ra)	75	75	75	75
무게(kg)	4.2	4.2	14.4	14.4
인증	KS, 고효율	KS, 고효율	KS, 고효율	KS, 고효율

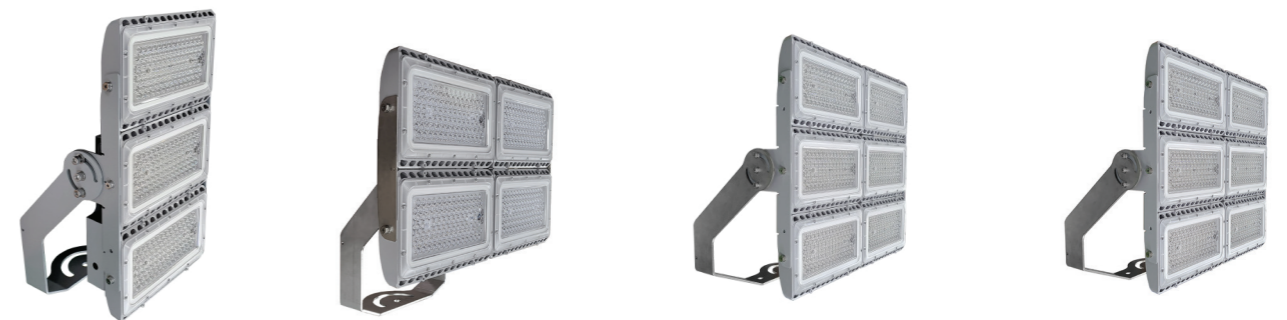

모델명	NFL-H10-600U	NFL-H10-800U	NFL-H10-10KU	NFL-H10-12KU
소비전력(W)	600	800	1,000	1,200
색온도(K)	5,000	5,000	5,000	5,000
광속(lm)	85,800	111,200	170,000	196,800
광효율(lm/W)	143	139	170	164
연색성(Ra)	75	75	75	75
무게(kg)	16.1	19, 25.3(안정기 포함)	25	25
인증	KS, 고효율	KS, 고효율	KS, 고효율	KS, 고효율

내압 방폭등



내장형

SPECIFICATION/CEILING(기본)

모델명	NEL-20-045-DCB	NEL-20-060-DCB	NEL-20-080-DCB	NEL-20-100-DCB
소비전력(W)	45	60	80	100
색온도(K)	5,700	5,700	5,700	5,700
광속(lm)	6,975	9,300	12,800	16,000
광효율(lm/W)	155	155	160	160
연색성(Ra)	80	80	80	80
무게(kg)	9.5			
인증	KS, 고효율, IECEx, ATEX, KCs			
내압	Ex db IIC T6 Gb			
분진	Ex tb IIIC T85°C Db			



내장형

SPECIFICATION/CEILING(기본)

모델명	NEL-30-045-DCB	NEL-30-060-DCB	NEL-30-080-DCB	NEL-30-100-DCB
소비전력(W)	45	60	80	100
색온도(K)	5,700	5,700	5,700	5,700
광속(lm)	7,200	9,600	12,800	16,500
광효율(lm/W)	160	160	160	165
연색성(Ra)	80	80	80	80
무게(kg)	9.6			
인증	KS, 고효율, KCs			
내압	Ex db IIC T6 Gb			
분진	Ex tD A21 T85°C			



내장형

SPECIFICATION/EMERGENCY BATTERY 60분 CEILING(기본)

모델명	NEL-40-045-DCB	NEL-40-060-DCB	NEL-40-080-DCB	NEL-40-100-DCB
소비전력(W)	45	60	80	100
색온도(K)	5,700	5,700	5,700	5,700
광속(lm)	7,200	9,600	12,800	16,500
광효율(lm/W)	160	160	160	165
연색성(Ra)	80	80	80	80
무게(kg)	12			
인증	KS, 고효율, KCs			
내압	Ex db IIC T6 Gb			
분진	Ex tD A21 T85°C			

외장형

SPECIFICATION/CEILING(기본) PENDANT BRACKET(45,90D)

모델명	NEL-00-045-DCB	NEL-00-060-DCB	NEL-00-080-DCB
소비전력(W)	45	60	80
색온도(K)	5,700	5,700	5,700
광속(lm)	6,975	9,300	12,800
광효율(lm/W)	155	155	160
연색성(Ra)	80	80	80
무게(kg)	9.9		
인증	KS, 고효율, IECEx, ATEX, KCs		
내압	Ex db IIC T6 Gb		
분진	Ex tb IIIC T85°C Db		



모델명	NEL-10-100-DCB	NEL-10-120-DCB	NEL-10-150-DCB
소비전력(W)	100	120	150
색온도(K)	5,700	5,700	5,700
광속(lm)	16,000	19,200	23,250
광효율(lm/W)	160	160	155
연색성(Ra)	80	80	80
무게(kg)	12.3		
인증	KS, 고효율, IECEx, ATEX, KCs		
내압	Ex db IIC T6 Gb		
분진	Ex tb IIIC T85°C Db		

